

# **SC Simplex Patch Panel**

Our new improved range of sliding drawer panels now have inter-changeable front plates for maximum versatility.

The sliding style tray allows easy access to the fibre termination compartment without having to remove the panel from the rack; ensuring panels can be reconfigured easily.

The tray can also be fixed at an angle whilst working so engineers' hands remain free. The tray is secured with two quick release fastenings. Standard 19" width with movable mounting brackets enable the panel to be mounted flush or recessed. Removable front plate panel allows for easy installation of adapters. One base accepts 3 different front panels to allow for maximum flexibility in supply. The panels can be supplied fully loaded with adapters, partially loaded or unloaded.

SC Simplex/ LC Duplex panels are suitable for up to 24 adapters in one line.\*

#### Features & Benefits

- Rattle-free, flangeless adapters are used to improve our manufacture lead times with a quick and easy snap in approach.
- Designed for installation with 19" racks to IEC 297-3
- Accommodates up to 48 splices via 2x 24f splice cassettes (double Stacked)
- 2 x 26mm and 2 x 22m cable entry holes to rear of panel
- Mounting brackets can be positioned flush, recessed or protruding
- Screen printed port identification to the front of panel
- Maximum 48 connections using LC Duplex adapters
- Maximum 24 connections using SC Simplex adapters
- Removable faceplate allows easy loading of adapters and reduced stock holding

#### **Available Kits**

- Kit 1 4 bunny clips, 1x 20mm cable glands, 6x 100mm cable ties + 4 cage nuts
- Kit 2 Kit 1 + Splice Bridge
- Kit 3 Kit 1 + Splice Cassette

## **Alternative Products**











**Pre-terminated Solutions** 

**Cleaning Solutions** 

Fibre Patch Leads


Fibre Pigtails

**Cable Management** 

\*Please note, product specifications are subject to change in line with availability

01225 338600


## info@advanceoptics.co.uk




Specification	
ELEMENT	CHARACTERISTIC
U Size	1U
Width	433mm
Depth	243mm
Cable Entry Slots	2 x 26mm / 2 x 22mm
Cable Anchor Points	Rear and External
Material	Cold-rolled Steel
Colour	Black (Powder Coated) RAL: 9005
Compliant to	RoHS, REACH

### Application

- **Optical Splicing & patching**
- Data centres, premise installations, telecommunication networks
- Ethernet, Fibre Channel, ATM, LAN, MAN, and WAN
- Data Communication
- Suitable for all Lite Linke pre-terminated solutions

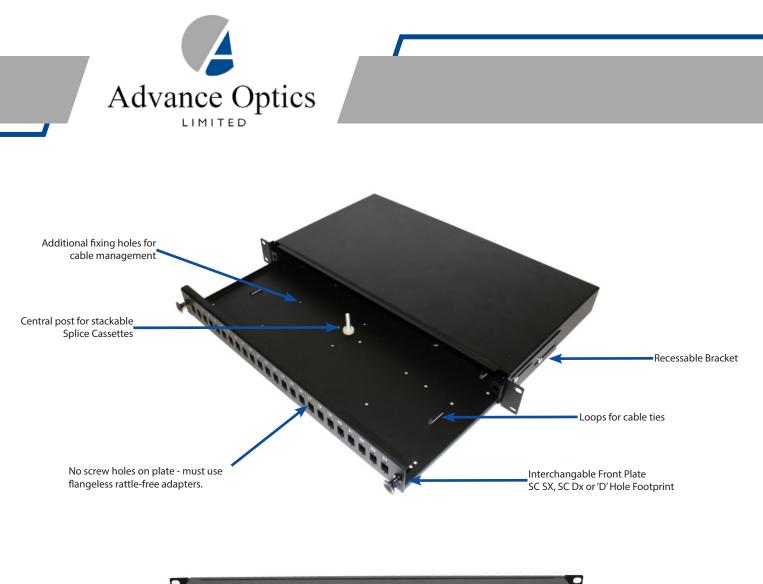

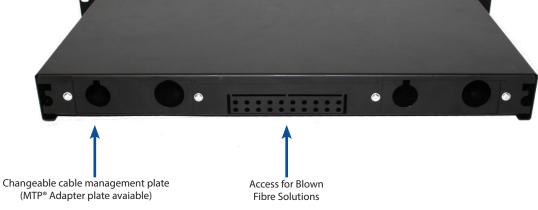

## **Available Accessories**











**Bunny Clips** 

20mm Cable Glands

Splice Bridges

Splice Cassettes

**Cable Management Spools** 

\*Please note, product specifications are subject to change in line with availability

01225 338600

info@advanceoptics.co.uk