


Loose Tube CST/SWA Preterm Assembly (Generic)

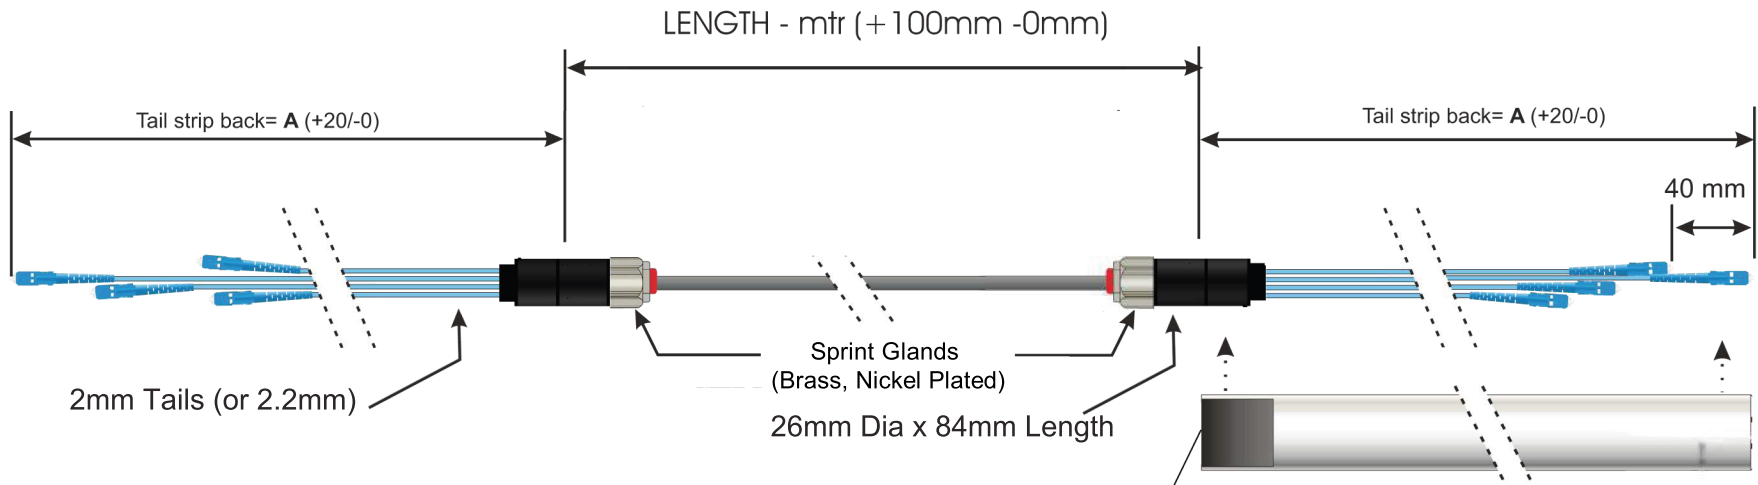

Notes:

Components:

A=Tail strip back lengths:

- 4 core = 500mm) 20mm Gland
- 8 core = 800mm)
- 12 core = 1000mm)
- 16 core = 1000mm)
- 24 core = 1450mm)

Testing:

- Insertion loss @ 1310 nm
- Back reflectance @ 1310 nm ≥ 50 dB
- Insertion loss @ 850 nm
- All tests in accordance with insertion loss and test version 1
- Test result sheet to be included

Packaging:

- 1-49mtrs coiled, packed in bubblewrap
- 50+ on a reel


Cable type

- 9/125 μ m
- 50/125 μ m
- 62.5/125 μ m
- Om3
- XX Core
- CST/SWA
- Loose tube.

Clear protective tubing assembly with pulling eye used at both ends

Labelling

ID labelling on main cabling legs to be identified

ISSUE NO:	1	2	3	4	5	6	Customer	
Date	25/02/08	24/07/08	07/05/13	06/03/15	17/04/2018			
Checked by	N.Parys	J. Clark	B. Williams	P.Davenport	M.Lenihan			
Product App.	P.Davenport	P. Davenport	P. Davenport	M.Lenihan	B.Williams			
Approved by	S.Luke							
Drawn G.Hilditch	Material RoHS compliant		Revision note		Tolerances unless otherwise stated All dimensions in millimetres		Title LooseTube CST/SWA Preterm Assembly (Generic)	Drawing Number DN 0750
Scale not to scale								